




CAPELLI

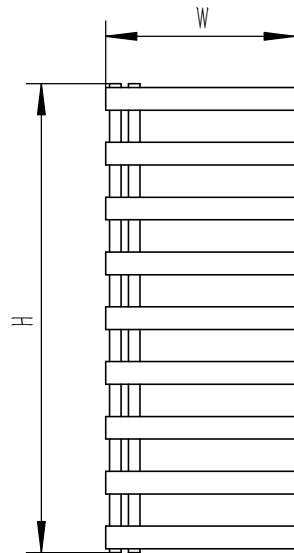


FRONT VIEW

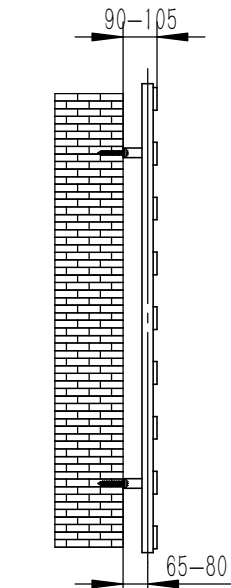

SIDE VIEW

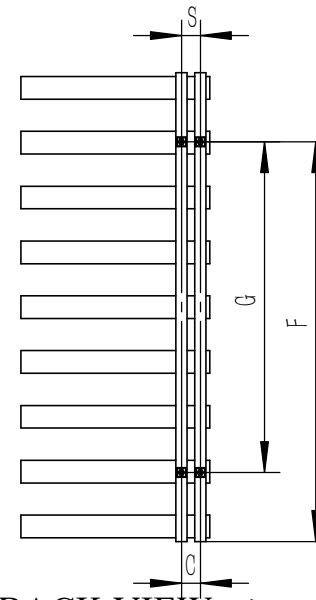

BACK VIEW



TOP VIEW

SUPPLIED INSTALLATION ACCESSORIES



BLANKING PLUG 1PCS



INSERT 4PCS



SCREW 4PCS



AIR VENT 1PCS



BRACKET 4PCS



WALL PLUG 4PCS



GRAB SCREW 4PCS




SCREW 4PCS



ALIEN KEYS 1PCS

- Vertical Mounting
- Optional 304 QUALITY STAINLESS STEEL RADIATOR (RNS-CPL5123P:CAPELLI RADIATOR)
- POLISHED
- MAX Operational Pressure:10Bar
- Inlet/Outlet:1/2"Female Pipe Thread
- All Dimensions are in mm

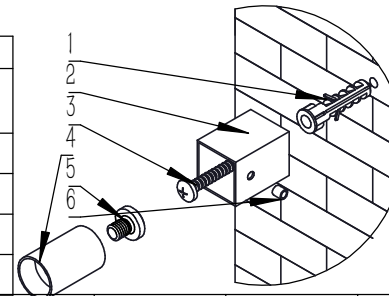

Product Name	Product Cude	Height	Width	Thick Ness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger To Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Wat-Btu/hr(Δ50°)
		mm	mm	mm	mm	mm	mm	mm	L	kg	
CAPELLI	RNS-CPL5080P	805	500	40	50	50	622.5	440			
CAPELLI	RNS-CPL5123P	1240	500	40	50	50	1057.5	875			
CAPELLI	RNS-CPL5152P	1530	500	40	50	50	1347.5	1165			

REINA

www.reinadesign.co.uk

info@atayglobal.com

TEL:+44 1787 238540