

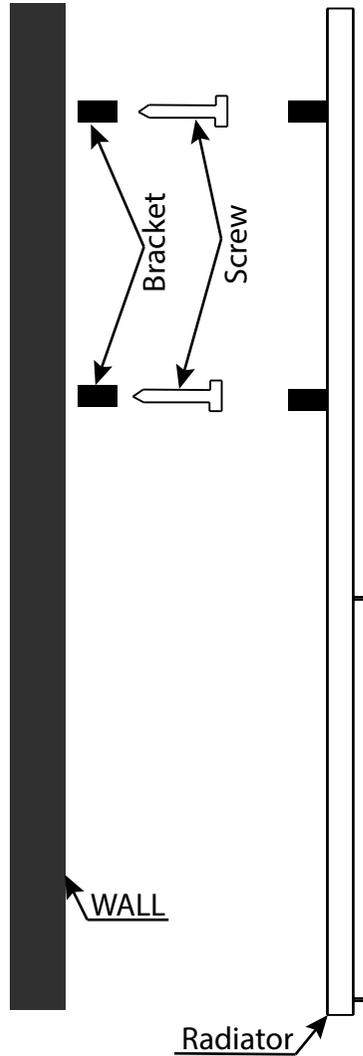


# YORK INSTALLATION GUIDE

*This product must be fitted only by a fully qualified installer.*

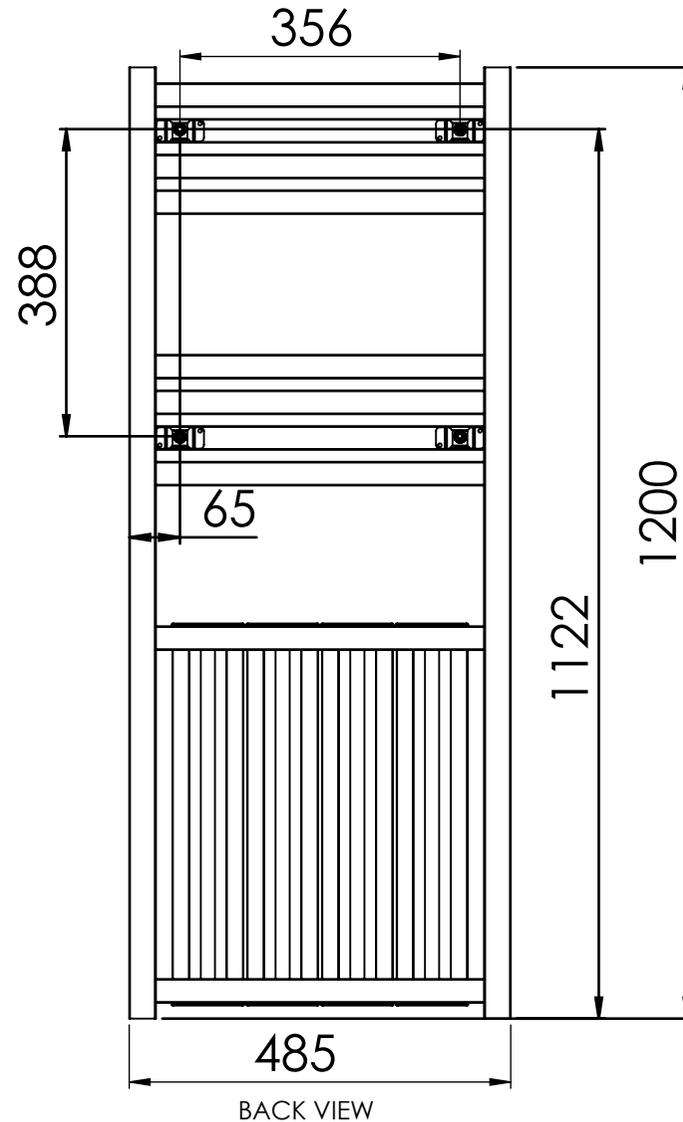

|                          |  |
|--------------------------|--|
| CLIPS X 4PCS             |  |
| WALL ANCHORS<br>4 PCS    |  |
| FIXING X<br>SCREWS 4 PCS |  |
| CAP X 2 PCS              |  |
| END PLUG X 1 PCS         |  |
| AIR VENT X 1 PCS         |  |

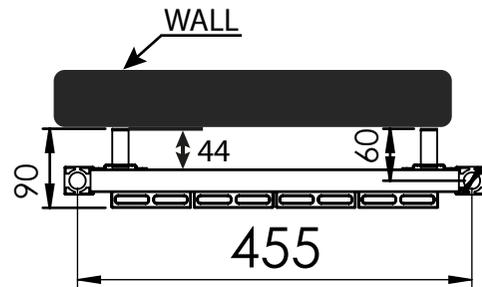

## GENERAL RECOMMENDATION

- Before fitting the radiator it is necessary to wash out the heating system to remove any existing mud, scale, work residues, traces of flux, oil, etc.
- When the system water pH is outside the 8,5 - 5,5 range and/or when the dissolved is above 0,1mg/liter, it is always needed to protect the heating system components (the radiator is one of these) with a proper chemical treatment compatible with all parts in contact with water (silicon rubber too).
- In order to fit the radiator to the wall, it is necessary to choose the proper fixings for the wall material.
- If the system water exceeds °50C, please install a warning mark near the radiator to avoid any accidental scalding.
- Clean the radiator surface only with a soft cloth to avoid scratching the finish and do not use chemical againts during cleaning operations. It is prohibited to climb onthe radiator.
- Maximum working temperature °95C, maximum working pressure 4 bar.