




CAVO

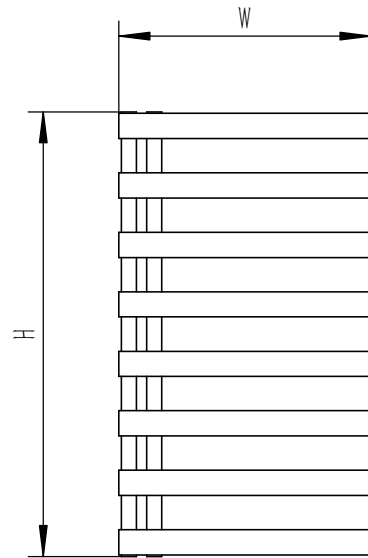


FRONT VIEW

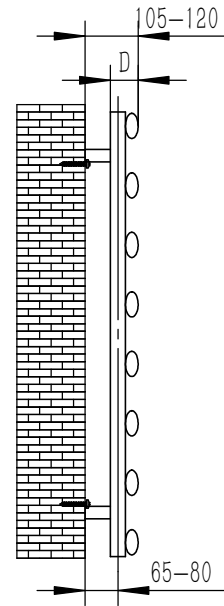

SIDE VIEW

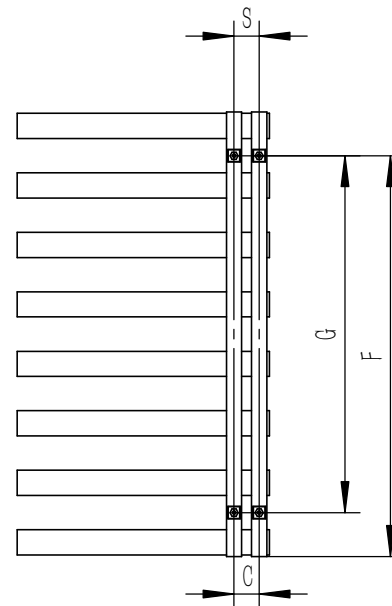

BACK VIEW



TOP VIEW

SUPPLIED INSTALLATION ACCESSORIES



BLANKING PLUG 1PCS



INSERT 4PCS



SCREW 4PCS



AIR VENT 1PCS



BRACKET 4PCS



WALL PLUG 4PCS



GRAB SCREW 4PCS




SCREW 4PCS



ALIEN KEYS 1PCS

- Vertical Mounting
- Optional 304 QUALITY STAINLESS STEEL RADIATOR (RNS-CV508P/B:CAVO RADIATOR)
- POLISHED
- MAX Operational Pressure:10Bar
- Inlet/Outlet:1/2"Female Pipe Thread
- All Dimensions are in mm

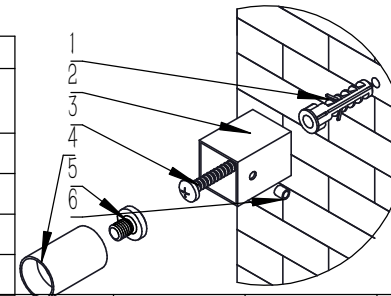

| Product Name | Product Cude | Height | Width | Thick Ness | Plumbing Axes Center to Center | Hanger Axes Horizontal | Hanger To Bottom of the Product | Hanger Axes Vertical | Water Volume | Empty Weight | Thermal Output |
|--------------|-----------------------|---------|---------|------------|--------------------------------|------------------------|---------------------------------|----------------------|--------------|--------------|----------------------|
| | | H mm | W mm | D mm | C mm | S mm | F mm | G mm | - L | - kg | Wat- Btu/hr(Δ50°) |
| RNS-CV508P/B | CAVO S- 500/8 B+P | 882 | 500 | 55 | 50 | 50 | 795 | 708 | 4.48 | 8.54 | 325-1108 |
| RNS-CV512P/B | CAVO S- 500/11 B+P | 1236 | 500 | 55 | 50 | 50 | 1147 | 1058 | 6.16 | 11.45 | 449-1532 |

